



BAUER COMMUNICATIONS, INC.


PRECISION TRANSFORMERS

By Reichenbach Engineering

line in
15K:15K
+22

RE-11P-2

LINE INPUT TRANSFORMER

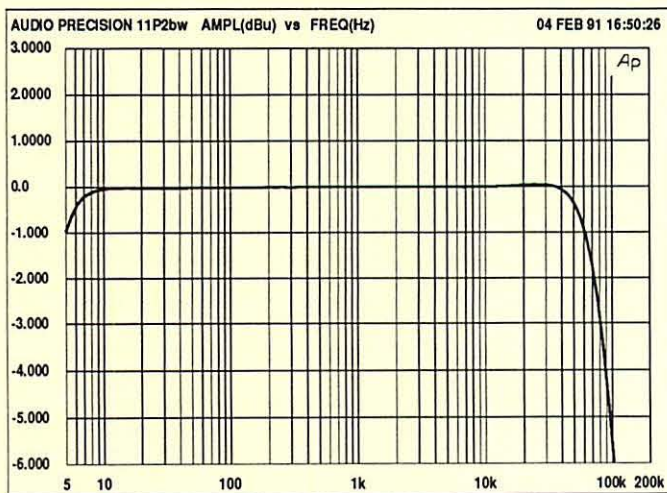


RE-11P-2 MAGNITUDE RESPONSE

- **Impedance Ratio:** 15K ohms to 15K ohms
- **Primary source Impedance:** 600 ohms or less
- **Turns Ratio:** 1:1
- **20Hz Max Input Level:** +22 dBu
- **30Hz Max Input Level:** +26 dBu
- **Bandwidth (-3db point):** 80 kHz
- **Magnetic Shield:** 30db case with separate lead (Wht)
- **Faraday Shield:** 1 with separate lead (Blk)
- **Recommended Load:** 10K - 15K ohms
- **RC network:** 15k ohms + 350 pf

NOTE: All transformers formerly sold under the *Jensen Transformers* name are the design and manufacture of Reichenbach Engineering.

Specifications subject to change without notice or obligation.

©1991 BCI

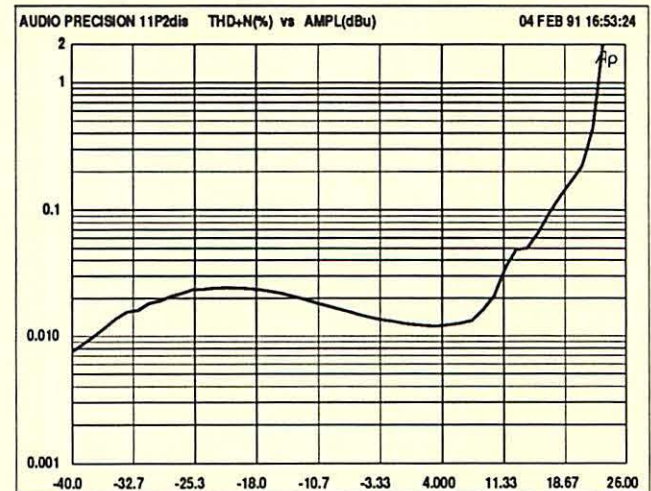

RE-11P-2 20Hz DISTORTION

1.31 in

1.31 in

